

Millivolt Valves and Switching Accessories for Hargrove Sets




Millivolt Valves (RME-PO = KIT, RSMVNG-C = VALVE ONLY)

Robert Shaw Millivolt Valves will now be shipped when millivolt valves are ordered.


Features:

- * HIGH 250° HEAT RATING - PREVIOUSLY 175°
- * LESS REQUIRED CLEARANCES THAN SAFETY PILOT WHEN MOUNTED ON THE END OF BURNER
- * SMALL VALVE - LESS VISIBLE IN FIREPLACE

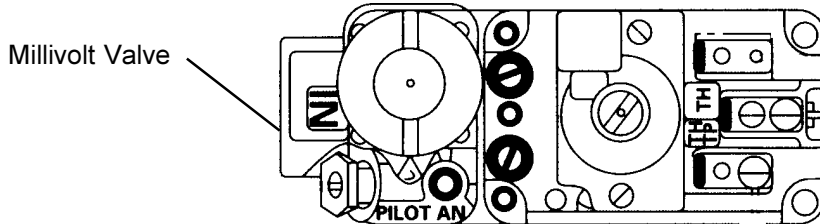


WALL SWITCH (WS) included in mil-kit

- * Convenience with the flip of a switch
- * Best for new construction - wires must be run through to mounting location

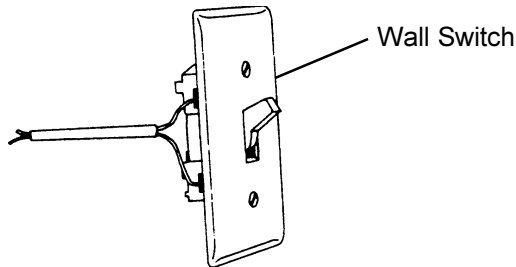

BARK CHIP (BCS) & PINE CONE SWITCH (PCS)


- * Decorative switching device that can be located in the fireplace
- * No wires to run outside of the fireplace
- * Hidden switch for more realism

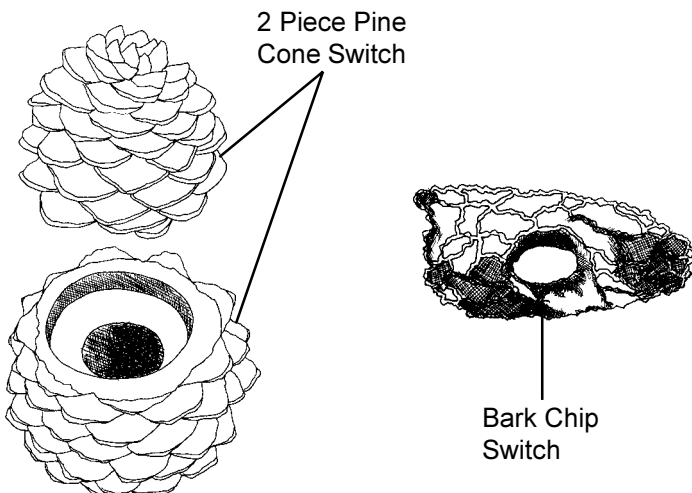

REMOTE CONTROLS


BATTERY OPERATED (RC12V)

- * Receiver is battery operated - no receiver wires to 110 outlet
- * Infrared remote - receiver does not have to see remote when operating

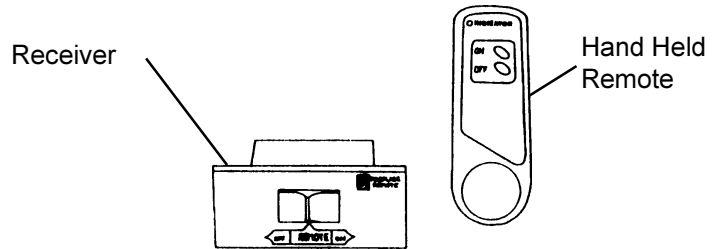

110 Volt OPERATED (RC110V)

- * Receiver plugs into outlet close to the fireplace - receiver wires must be run to 110 outlet
- * Receiver does not have to see remote when operating

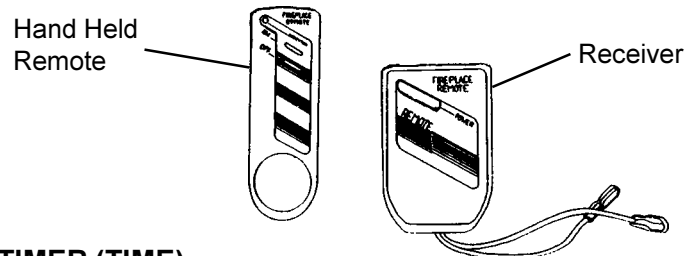

TIMER (TIME)

- * Allows 1 hour burning time before automatic shutdown
- * Best for new construction - wires must be run to wall mount location

